


**Oscillator, Ceramic SMD**

**3.3 Volt**

DATA SHEET	
Part Number	A102
Frequency Range	1.500MHz ~ 75.000MHz
Frequency Stability*	±100PPM Standard (See Option Table)
Operating Temperature Range	-10°C ~ 60°C Standard (See Option Table)
Supply Voltage (Vcc)	+3.3VDC ± 5%
Current Consumption	10mA < 20M, 30mA > 20M
Output Levels (HCMOS)	Voh = 3.1V Min, Vol = 0.25V Max
Rise Time (Tr) 10% to 90% of Vcc	5nS Max
Fall Time (Tr) 90% to 10% of Vcc	5nS Max
Output Symmetry	50 ± 10% measured at 1/2Vcc
Output Load	15pF HCMOS
Storage Temperature	-40°C ~ 125°C
Tri-State (input pin 1)	Output Active 2.7V Min Output High Z 0.4V Max
Packaging	Bulk Standard, Option (-TR) Tape & Reel
*Inclusive of calibration, temperature, supply, load and aging.	

OUTLINE DRAWING

Pin Connection	
1	N/C (Tri-State)
2	GND
3	Output
4	+ Vcc

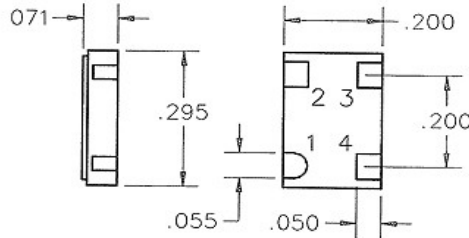

.061" Thickness Available  
Contact factory for details

PART NUMBER TABLE

Option Code	Specification
A	Symmetry 50±5%
B	Operating Temp -15°C ~ 75°C
C	Stability ±50PPM
C1	Stability ±25PPM
C2	Stability ±10PPM
D	Output Tri-State
F	Lead Configuration Gull Wing

**Part Number Generation**

A102 · Option Code · Frequency · Packaging  
ex: A102A-12.800M-TR  
(±100ppm, 45/55 Symm, -10°C ~ +60°C, Tape & Reel)

Please contact factory for suctom specifications