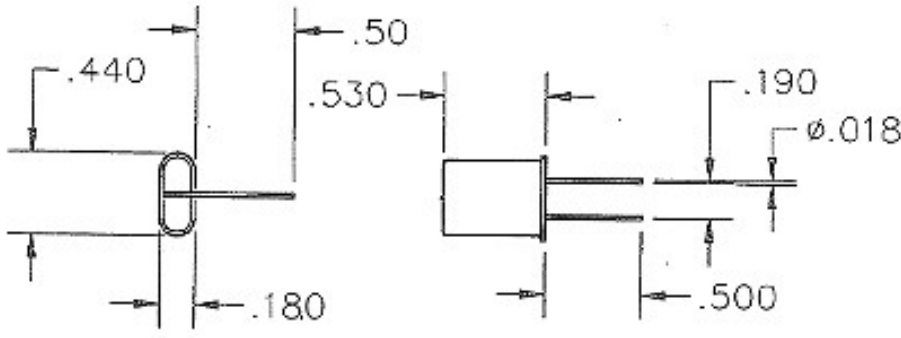


Crystal, HC49/U

DATA SHEET		
Part Number	AX106	
Frequency Range	1.000MHz ~ 160.000MHz	
Calibration Tolerance @ 25°C	±50PPM Standard (See Option Table)	
Operating Temperature Range	0°C ~ 70°C Standard (See Option Table)	
Frequency Stability over Temperature	±50PPM Standard (See Option Table)	
Operation Mode / ESR	1.0M ~ 3.0M Fund • 500Ω	
	3.01M ~ 4.20M Fund • 180Ω	
	4.3M ~ 12.3M Fund • 60Ω	
	12.4M ~ 50.0M Fund • 60Ω	
	60.0M ~ 90.0M 3 rd OT • 70Ω	
	91.0M ~ 160.0M 5 th OT • 55Ω	
Load Capacitance	16pF Standard, Specify Custom Values	
Shunt Capacitance	7.0pF Max	
Aging per year	±5.0PPM Max	
Drive Level	100nW — 1000μW (Calibration @ 100μW)	
Packaging	Bulk standard, Option (-TR) Tape & Reel	
OUTLINE DRAWING		
		
PART NUMBER TABLE		
Option Code	Specification	<p align="center">Part Number Generation</p> <p align="center">AX106 • Option Code • Frequency • Load Capacitance ex: AX106B-12.800M-18 (±50ppm(tolerance)/±30ppm(stability), 0°C ~ 70°C, 18pF)</p> <p align="center">Please contact factory for custom specifications</p>
A	Stability ±20 PPM AT Cut Only	
B	Stability ±30 PPM AT Cut Only	
C	Operating Temp -30°C ~ +85°C	
D	Tolerance ±20 PPM @ 25°C	
E	Tolerance ±30 PPM @ 25°C	
F	Fund. 25.0M ~ 50M BT Cut*	
G	Fund. 24.0M ~ 36M AT Cut	
H	3 rd Lead	
I	Insulator Tab	
J	Vinyl Sleeve	
	*±100 PPM Stability Only	